Canon

Micro-portable
Multimedia Projector

LV-X2/LV-S2



SMALL PROJECTOR, LARGE PROJECTION

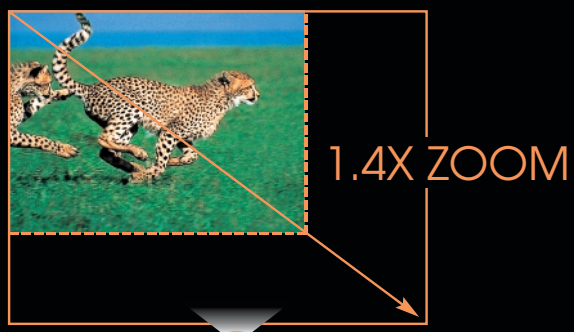

Featuring a newly developed, Canon High-Precision Wide-Angle lens, the LV-X2 and LV-S2 deliver large, crisp images from short distances. Offering a 1.4X Optical Zoom, the highest in its class, these projectors provide unbeatable versatility. A lightweight design makes them comfortable to carry to the classroom down the hall, or the conference room around the world.

Short Throw Distance

Project 100-inch images from as close as 9.2 feet. Canon's new ultra-wide angle lens makes it perfect for small rooms, allowing you to make a big impression virtually anywhere.

Easier Placement

At 1.4X, the LV-X2 and LV-S2 boast the largest optical zoom in their class, providing a wide range of throw distances to suit your needs. Getting the image size you want has never been easier.

Native XGA (LV-X2)

The LV-X2 provides stunning Native XGA resolution (1,024 X 768 pixels), and even SXGA resolution (1,280 X 1,024 pixels) through high-quality compression. It delivers a brightness of 1100 ANSI lumens.

Native SVGA (LV-S2)

The LV-S2 produces Native SVGA resolution (800 X 600 pixels) and projects XGA (1,024 X 768 pixels) by using advanced, high-quality compression. It offers a brightness of 1000 ANSI lumens.

www.canonprojectors.com

LV-X2/LV-S2

THE FINEST MICRO-PORTABLES FOR THE HOME OR OFFICE!

Superior Optical Technology

Canon's world-renowned expertise in optical technology puts the LV-X2 and LV-S2 at the top of their class for image quality. Inside each model, the new projection lens is linked to Canon's innovative Clear Prism, which ensures superior color fidelity through efficient light processing.

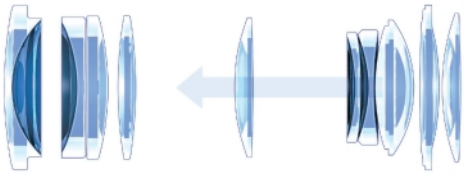

Diverse Image Adjustment

The LV-X2 and LV-S2 offer an amazing degree of picture control. New adjustments, such as Auto Grayscale and Auto Fleshtone have been added to a full list of settings that include High Contrast, Cinema, Gamma Adjustment, just to name a few. Save your settings in memory for easy recall whenever you choose.

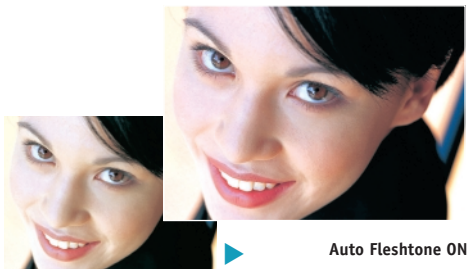

Auto Fleshtone OFF

Auto Fleshtone ON

Auto Grayscale OFF

Auto Grayscale ON

Advanced Controls

Digital Keystone Correction eliminates trapezoidal distortion (up to ±20 degrees) to keep your images perfectly proportioned. 16X Digital Zoom lets you enlarge a section of the image for a closer look.

Wide Compatibility

The LV-X2 and LV-S2 can be hooked up to a wide variety of electronic devices, and seamlessly connect to computers running Windows and Mac OS. They also feature Component Video input for high-quality display of DVD and HDTV, transforming an ordinary living room into a movie theater.

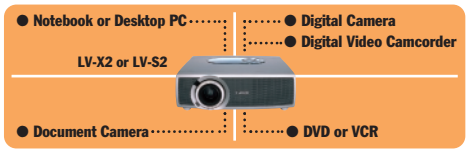

User-Friendly Operation

Connect your input source, and the projector will automatically adjust itself to the incoming signal. All functions can be controlled with a wireless remote control, and settings can be easily changed by using a flexible, on-screen display menu. USB mouse control is also available.

LV-X2/LV-S2 Kit Contents

• Projector • Wireless remote control (AA alkaline batteries included) • VGA computer cable • Lens cap • Soft carrying case • Power cable • Warranty card • User's manual

Optional Accessories

• Remote control with mouse and laser functions (LV-RC01) • Mouse Cable for PS/2 (LV-CA25) • Mouse Control Cable for Serial (LV-CA26) • Mouse Control Cable for ADB (LV-CA27) • Ceiling Mount Adapter (LV-CL06) • Replacement Lamp for LV-X2 (LV-LP15) • Replacement Lamp for LV-S2 (LV-LP14)

Nomenclature

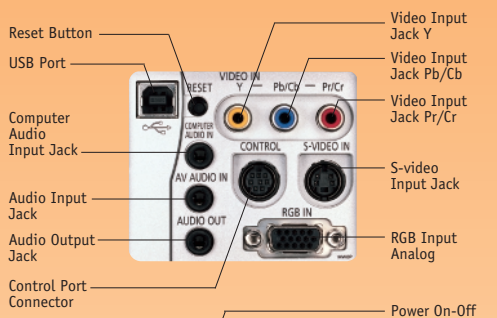

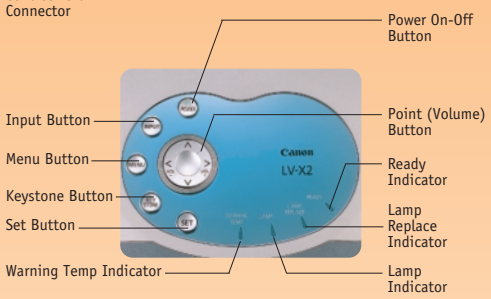

Specifications

Type: Micro-portable LCD projectors
LCD Panel: 0.7" polysilicon active matrix TFT x 3, 4:3 aspect ratio
Number of Pixels: LV-X2: 2,359,296 [1,024 (H) x 768 (V)]; LV-S2: 480,000 [800 (H) x 600 (V)]
Supported Display Standards: LV-X2: Native XGA, SXGA (Compression), SVGA, VGA; LV-S2: Native SVGA, XGA (Compression), VGA
Light Source: LV-X2: 132W UHP; LV-S2: 150W UHP
Brightness: LV-X2: 1,100 ANSI lumens; LV-S2: 1,000 ANSI lumens
Uniformity: 85% (corner to center)
Contrast Ratio: LV-X2: 300 to 1; LV-S2: 350 to 1
Horizontal Resolution: LV-X2: 550 TV lines; LV-S2: 500 TV lines
Projection Lens: 20.3 to 28.2 mm, F1.6 to 1.9, 1.4X zoom
Lens Shifting: 19:1
Elevation Adjustment: Up to 10.7˚
Projected Image Size (Projection Distance): WIDE mode: 40" (3.6 ft.), 100" (9.2 ft.), 150" (14.1 ft.), 200" (18.7 ft.) **TELE mode:** 40" (5.2 ft.), 100" (13.1 ft.), 150" (19.7 ft.), 200" (26.2 ft.)
Digital Keystone Distortion Compensation Angle: ±20°
Color System: NTSC/PAL/SECAM/NTSC 4.43/PAL-M/PAL-N
Supported Computers: PC, Macintosh compatible, workstations (Some workstations are not supported.)
Scanning Frequency: LV-X2: 15 to 100kHz (horizontal sync), 50 to 100Hz (vertical sync), 140MHz dot clock; LV-S2: 15 to 80kHz (horizontal sync), 50 to 100Hz (vertical sync), 100MHz dot clock
Audio Output: 1.0W mono
Built-in Speaker: 1.4 x 0.8 in. (35 x 20 mm), 1 pc.
Rated Supply Voltage: 100 to 120/200 to 240V AC, 50/60Hz
Power Consumption: LV-X2: 210W; LV-S2: 250W
Ambient Operation Temperature: 41 to 95˚F (5 to 35˚C)
Storage Temperature: 14 to 140˚F (-10 to 60˚C)
Dimensions (W x H x D): 10.2 x 3.0 x 9.6 in./260 x 76 x 244.5 mm excluding legs (Legs: 0.6 in./15mm)
Weight of Main Unit: Approx. 6.4 lbs. (2.9kg)

Errors and omissions excepted. Weight and dimensions are approximate. Specifications are subject to change without notice. Canon is a trademark of Canon Inc.

Canon KNOW HOW™

1-800-OK-CANON
www.canonprojectors.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042, U.S.A.

Canon Canada Inc.
6390 Dixie Road
Mississauga,
Ontario L5T 1P7, Canada

Canon Mexicana, S. DE R.L. DE C.V.
Periférico Sur No. 4124, 5º y 6º pisos,
Col. Ex-Rancho de Anzaldo,
01900 México, D.F.

Canon Latin America
703 Waterford Way Suite 400
Miami, FL 33126, U.S.A.

YT2-1305 0034W460
© 2002 Canon USA, Inc.
PRINTED IN USA